

FI 360 SERIES - LED Rotatable Wall Pack

The FI 360 SERIES - LED Rotatable Wall Pack, Up to 145 lm/W, Non-Tunable, 3-CCT and Tunable, IP65 Wet Location, 0-10V Dimmable Models.

Premium Features

Lumen Output	3625 to 10640 lumens
Efficacy	Up to 145 lm/W
Input Voltage	120-277V
Dimmable	0-10V
CCT	5000K, Select (30K, 40K, 50K)
IP Rating	IP65 Wet Location
Warranty	5 Years

Applications

Rotatable LED Wall pack lights are suitable for stairways, tunnels, alleyways, building perimeters, security walls, and packing garages

Construction

Manufactured from durable die-cast aluminum to protect against rust, corrosion, dirt and insects in outdoor, wet location environments. IP65 Wet Location rated for dust-tight, water jets: IEC 60529.

Electrical

Input voltages 120-277V with 0-10V Dimming. 25W model 3-CCT, 60W Max Model 3-Wattages + 3-CCT), 80W in 5000K. Operating temperatures -22°F to 113°F (-40°C TO 45°C).

Mounting

Wall mounted installations.

Optics

Anti-UV Clear Ridged Polycarbonate Lens.

Controls

Fixture integrated Photocell sensor available.

Listings

UL certified to meet US and Canadian standards. RoHS compliant.

Warranty

5 yr /50K hrs. View at: <https://falkorindustry.com/warranty/>.

Project:

Date:

Catalog No:

Prepared By:

25W Models




60W Max and 80W Models



Correlated Color Temperatures (CCT)


3000K



4000K



5000K



Specifications

Energy Data

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: 25W, 3-Wattages (60W Max), 80W
Power Factor: >0.9
Total Harmonic Distortion: <15%
Operating Temperature: -22°F to 113°F (-40°C to 45°C)

Lighting Data

Lumens: 3625 to 10640 lumens
Lumens Per Watt: Up to 145 lm/W
CCT: Select (30K, 40K, 50K)
Dimmable: 0-10V Models
Color Rendering Index (CRI): >70
L70: 50000 hours

Ordering Information

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
FI-WPR-25W-CCT	25W	120-277V	0.23A@120V, 0.10A@277V	3625	145 lm/W	(30K, 40K, 50K)	0-10V	Black	6.54"L x 9.45"W x 5.87"D
FI-WPR-60/40/25W CCT	(25W, 40W, 60W)	120-277V	0.23A@120V, 0.10A@277V	3175	127 lm/W	(30K, 40K, 50K)	0-10V	Black	10.00"L x 9.45"W x 5.87"D
			0.37A@120V, 0.16A@277V	5080					
			0.55A@120V, 0.24A@277V	7620					
FI-RWP-80WA1	80W	120-277V	0.73A@120V, 0.32A@277V	10640	133 lm/W	50K	0-10V	Black	10.00"L x 9.45"W x 5.87"D

Sensor


MS-PUNVC01 Photocell INSTALLED - Photocell Sensor

Junction Box Junction Box For Sensor Wires

Physical Dimensions

25W Model

10.00"L x 9.45"W x 5.87"D

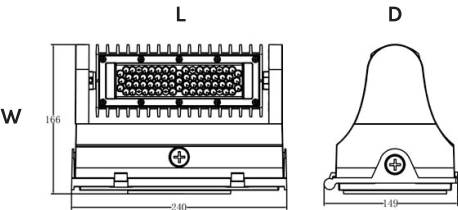

60W Max and 80W Models

10.00"L x 9.45"W x 5.87"D

